

# 4" D


## VACUUM-PRIME UNIT DUO 4" D/ J4-250 TWGMVM/KVT3.60



### Features

- Automatic dry priming with patented separation system
- Robust, compact construction
- No oil emission to atmosphere
- Lower noise level
- Lower operating costs
- Ease of inspection and maintenance
- Fuel tank for over 24 hours operation
- Hand pump to drain oil sump


### Performance

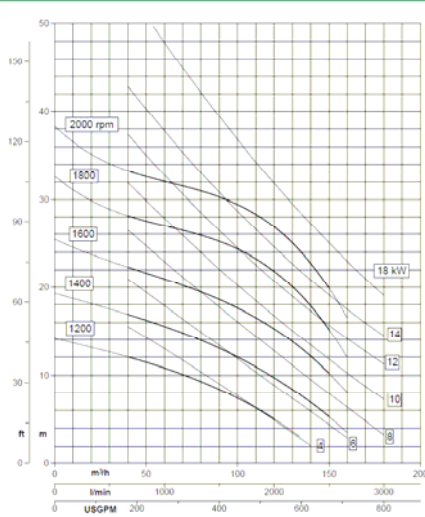

### Specifications

- Max. water capacity: 150 m<sup>3</sup>/h
- Max. head: 32 m
- Speed: 1800 RPM
- Size of solids handled: 50 mm
- Cast iron construction
- Rubber faced wear plates
- Silicon carbide mechanical seal with automatic lubricator
- VM SUN 2105E2 diesel engine, continuous power output: 22 kW at 1800 RPM
- Electric start
- Oil free vacuum pump: no inspection required
- Easily removable galvanised steel lifting hook

### Overall dimensions - Weight

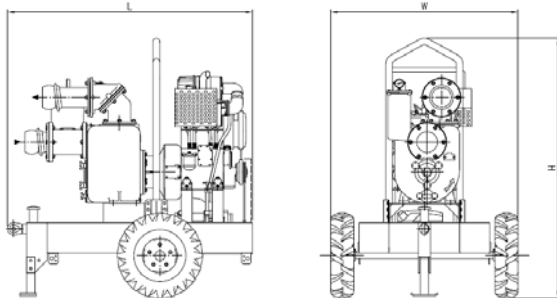

L	W	H	Weight
1790mm	1368mm	1902mm	778kg

### Applications

- Wellpoint dewatering systems
- Horizontal drainage with drainage hoses
- Construction site dewatering
- Sewage by-pass
- Quarries
- Sludge and slurry

Code:

List price:



**VARISCO S.p.A.**  
 Zona Industriale Nord - 35129 PADOVA - ITALIA  
 Direzione e Uffici: Terza Strada, 9 / Produzione e magazzini: Prima Strada, 37  
 Tel. +39 049 8294111 - international +39 049 8294111  
 Fax +39 049 8294373 +39 049 8076762  
 italia@variscospa.com export@variscospa.com  
 www.variscospa.com

AZIENDA CON SISTEMA  
 GESTIONE QUALITA'  
 CERTIFICATO  
 UNI EN ISO 9001-2000