

6"E


VACUUM-PRIME UNIT
DUO 6"E/
J6-250TWGMC3/KVT3.60



Features

- ☐ Automatic dry priming with patented separation system
- ☐ Robust, compact construction
- ☐ No oil emission to atmosphere
- ☐ Lower noise level
- ☐ Lower operating costs
- ☐ Ease of inspection and maintenance
- ☐ Automatic star/delta starting
- ☐ Control panel ready for operation with floats


Performance

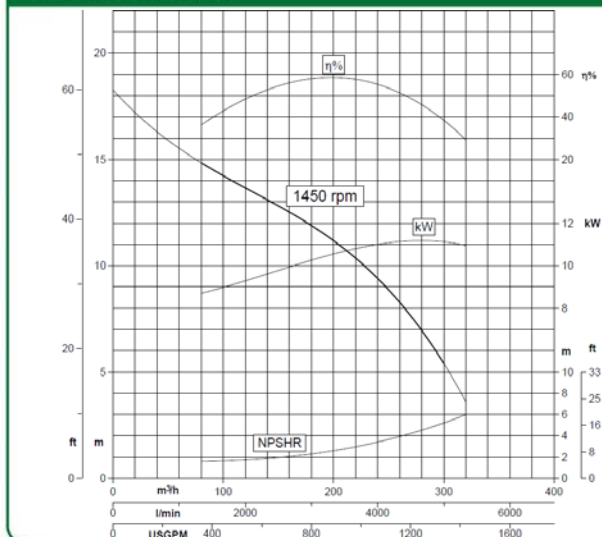

Specifications

- ☐ Max. water capacity: 300 m³/h
- ☐ Max. head: 18 m
- ☐ Speed: 1450 RPM
- ☐ Size of solids handled: 76 mm (2 blade impeller)
- ☐ Cast iron construction
- ☐ Rubber faced wear plates
- ☐ Silicon carbide mechanical seal with automatic lubricator
- ☐ Pump electric motor: 11 kW
- ☐ Oil free vacuum pump: no inspection required
- ☐ Easily removable galvanised steel lifting hook
- ☐ Control panel to CE standards with hour meter and visible alarm

Overall dimensions - Weight

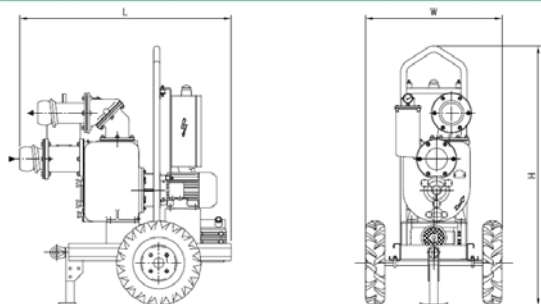

L	W	H	Weight
1497mm	966mm	1837mm	587kg

Applications

- ☐ Wellpoint dewatering systems
- ☐ Horizontal drainage with drainage hoses
- ☐ Construction site dewatering
- ☐ Sewage by-pass
- ☐ Quarries
- ☐ Sludge and slurry

Code: 10030367

List price: