


BLACK 2F

POMPA SOMMERGIBILE DA FOGNATURA / SUBMERSIBLE SEWAGE PUMP 1"1/2 - DN 40 GHISA-ACCIAIO INOX AISI 304 / CAST IRON-AISI 304 STAINLESS STEEL 2900 rpm



Girante vortex
Temp. liquido: 0°C +40°C
Temp. ambiente max: +40°C
Cavo elettrico: 10 m (H07RN-F)
Profondità max d'immersione: 20 m
Accessori vedi pag. 76


Vortex impeller
Liquid temperature: 0°C +40°C
Max. ambient temperature: +40°C
Power cable: 10 m (H07RN-F)
Maximum immersion depth: 20 m
Accessories see page 76

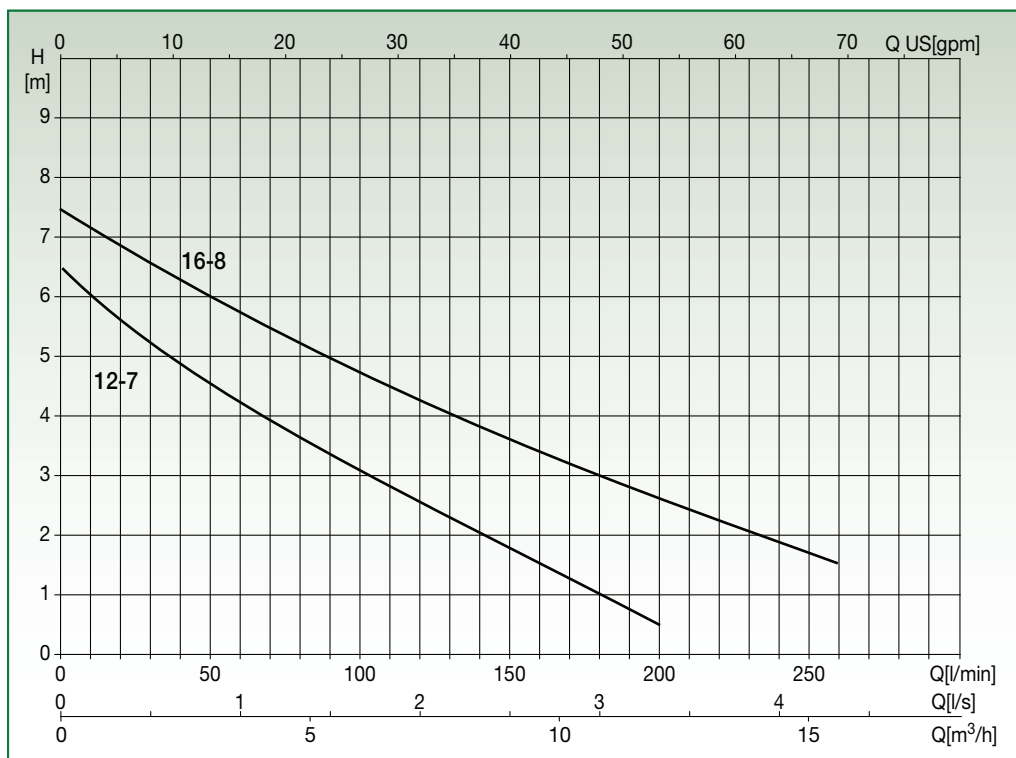

Collaudo a norma UNI EN ISO 9906 liv. 2 - Liquido di prova: acqua ($\rho = 1000 \text{ kg/m}^3$, visc. cinematica $\nu = 1 \text{ mm}^2/\text{s}$) - Tolleranze curve prestazione sec. norma UNI EN ISO 9906 All. A
Test to UNI EN ISO 9906 level 2 - Test liquid: water ($\rho = 1000 \text{ kg/m}^3$, kinematic viscosity $\nu = 1 \text{ mm}^2/\text{s}$) - Tolerance on performance curves to UNI EN ISO 9906 Annex A

DATI PRESTAZIONALI / PERFORMANCE DATA

Codice Code	Modello / Model	Motore / Motor				Portata / Capacity						
		P _{1n}	P _{2n}	V _n	I _n	[l/min]	0	50	100	150	200	260
		[kW]	[kW]	[V]	[A]	[m³/h]	0	3	6	9	12	15,6
10042541	BLACK 2F4 12-7 MA	0,9	0,5	1x230	4,0	H [m]	6,5	4,5	3,1	1,7	0,5	
10042542	BLACK 2F4 16-8 M	1,1	0,6	1x230	5,0		7,5	6	4,8	3,7	2,7	1,5
10042543	BLACK 2F4 16-8 MA	1,1	0,6	1x230	5,0		7,5	6	4,8	3,7	2,7	1,5
10042544	BLACK 2F4 16-8 T	0,9	0,6	3x400	2,0		7,5	6	4,8	3,7	2,7	1,5

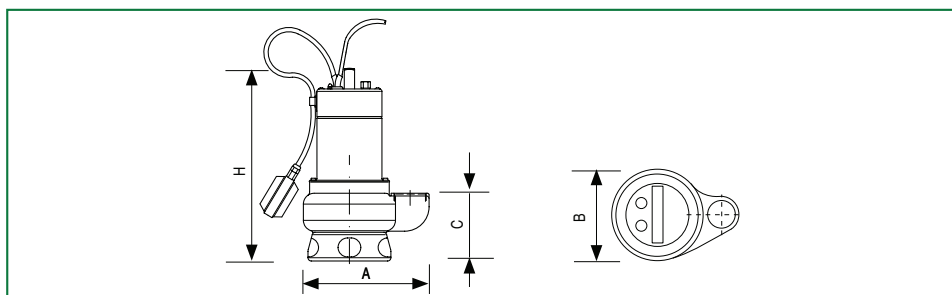

DATI DIMENSIONALI / DIMENSIONAL DATA

Modello / Model	Cavo / Cable	Dimensioni / Dimensions [mm]				Connessione / Connection		Passaggio solidi Solids handling [mm]	Peso Weight [kg]
	[n° x mm²]	H	A	B	C	[mm]	[in]		
BLACK 2F4 12-7 MA	3 x 1	361	232	170	125	40	1" 1/2	30	11
BLACK 2F4 16-8 M	3 x 1	373	232	170	125	40	1" 1/2	35	12
BLACK 2F4 16-8 MA	3 x 1	373	232	170	125	40	1" 1/2	35	12
BLACK 2F4 16-8 T	4 x 1	373	232	170	125	40	1" 1/2	35	12