


BLACK 2G

POMPA SOMMERGIBILE DA FOGNATURA / SUBMERSIBLE SEWAGE PUMP 1" 1/2 - DN 40 GHISA / CAST IRON - 2900 rpm



Girante multicanale aperta a rasamento
Temp. liquido: 0°C +40°C
Temp. ambiente max: +40°C
Cavo elettrico: 10 m (H07RN-F)
Profondità max d'immersione: 20 m
Accessori vedi pag. 76


Multi-channel open impeller
with clearance
Liquid temperature: 0°C +40°C
Max. ambient temperature: +40°C
Power cable: 10 m (H07RN-F)
Maximum immersion depth: 20 m
Accessories see page 76

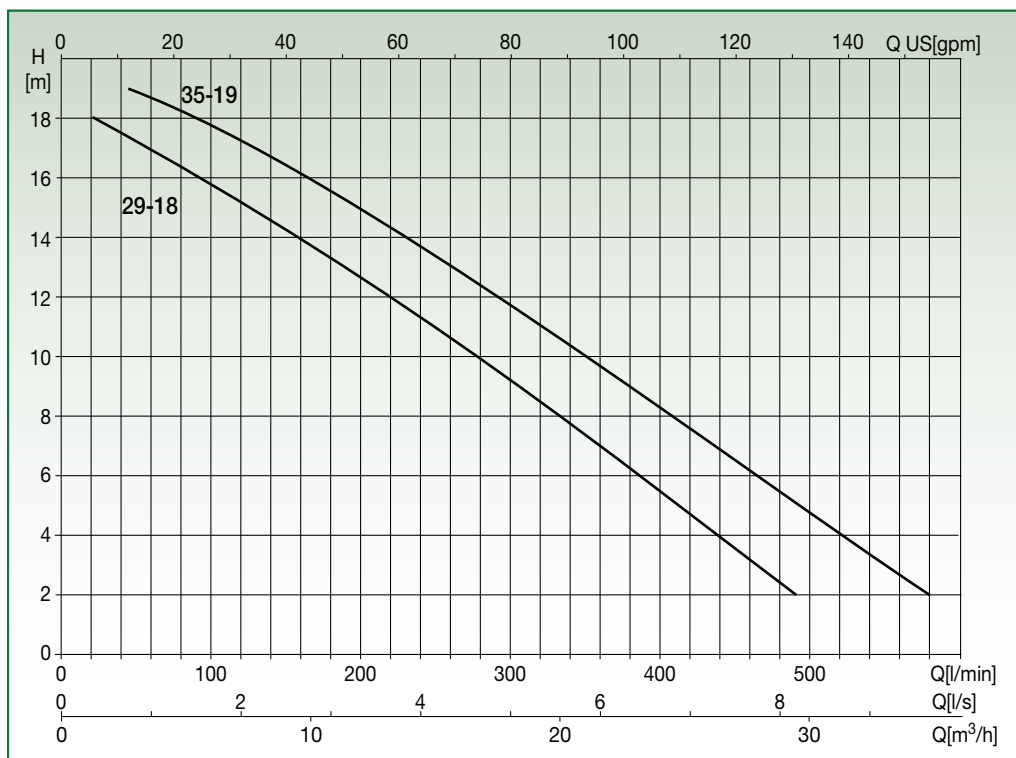

Collaudo a norma UNI EN ISO 9906 liv. 2 - Liquido di prova: acqua ($\rho = 1000 \text{ kg/m}^3$, visc. cinematica $\nu = 1 \text{ mm}^2/\text{s}$) - Tolleranze curve prestazione sec. norma UNI EN ISO 9906 All. A
Test to UNI EN ISO 9906 level 2 - Test liquid: water ($\rho = 1000 \text{ kg/m}^3$, kinematic viscosity $\nu = 1 \text{ mm}^2/\text{s}$) - Tolerance on performance curves to UNI EN ISO 9906 Annex A

DATI PRESTAZIONALI / PERFORMANCE DATA

Codice Code	Modello / Model	Motore / Motor				Portata / Capacity											
		P _{1n}	P _{2n}	V _n	I _n	[l/min]	20	60	120	180	240	300	360	420	490	580	
		[kW]	[kW]	[V]	[A]	[m³/h]	1,2	3,6	7,2	10,8	14,4	18	21,6	25,2	29,4	34,8	
10042441	BLACK 2G1 29-18 M	2,2	1,1	1x230	8,4	H [m]	18	17	15,3	13,4	11,3	9,2	7	4,8	2		
10042442	BLACK 2G1 29-18 MA	2,2	1,1	1x230	8,4		18	17	15,3	13,4	11,3	9,2	7	4,8	2		
10042443	BLACK 2G1 29-18 T	2,0	1,1	3x400	2,8		18	17	15,3	13,4	11,3	9,2	7	4,8	2		
10042444	BLACK 2G1 35-19 M	2,9	1,5	1x230	9,4			18,8	17,3	15,6	13,7	11,8	9,7	7,7	5,2	2	
10042445	BLACK 2G1 35-19 MA	2,9	1,5	1x230	9,4			18,8	17,3	15,6	13,7	11,8	9,7	7,7	5,2	2	
10042446	BLACK 2G1 35-19 T	2,5	1,5	3x400	3,6			18,8	17,3	15,6	13,7	11,8	9,7	7,7	5,2	2	

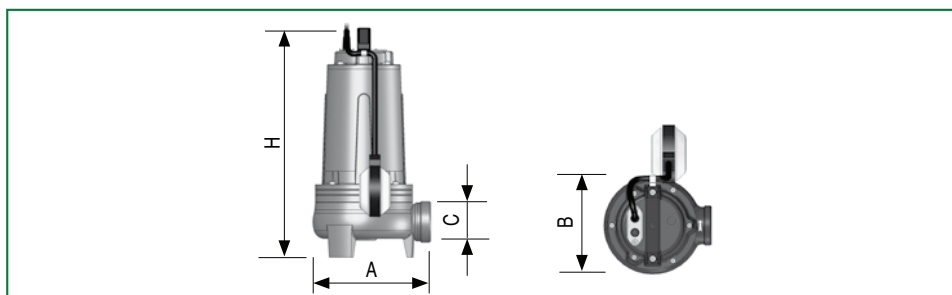

DATI DIMENSIONALI / DIMENSIONAL DATA

Modello / Model	Cavo / Cable	Dimensioni / Dimensions [mm]				Connessione / Connection		Passaggio solidi Solids handling [mm]	Peso Weight [kg]
	[n° x mm²]	H	A	B	C	[mm]	[in]		
BLACK 2G1 29-18 M	3 x 1	363	188	164	57	40	1" 1/2	22	19
BLACK 2G1 29-18 MA	3 x 1	363	188	164	57	40	1" 1/2	22	19
BLACK 2G1 29-18 T	4 x 1	363	188	164	57	40	1" 1/2	22	19
BLACK 2G1 35-19 M	4 x 1,5	363	188	164	57	40	1" 1/2	22	21
BLACK 2G1 35-19 MA	4 x 1,5	363	188	164	57	40	1" 1/2	22	21
BLACK 2G1 35-19 T	4 x 1	363	188	164	57	40	1" 1/2	22	21