


BLACK 2G

POMPA SOMMERGIBILE DA FOGNATURA / SUBMERSIBLE SEWAGE PUMP 2" - DN 50 GHISA / CAST IRON - 2900 rpm



Girante multicanale aperta a rasamento
Temp. liquido: 0°C +40°C
Temp. ambiente max: +40°C
Cavo elettrico: 10 m (H07RN-F)
Profondità max d'immersione: 20 m
Accessori vedi pag. 76



Multi-channel open impeller
with clearance
Liquid temperature: 0°C +40°C
Max. ambient temperature: +40°C
Power cable: 10 m (H07RN-F)
Maximum immersion depth: 20 m
Accessories see page 76

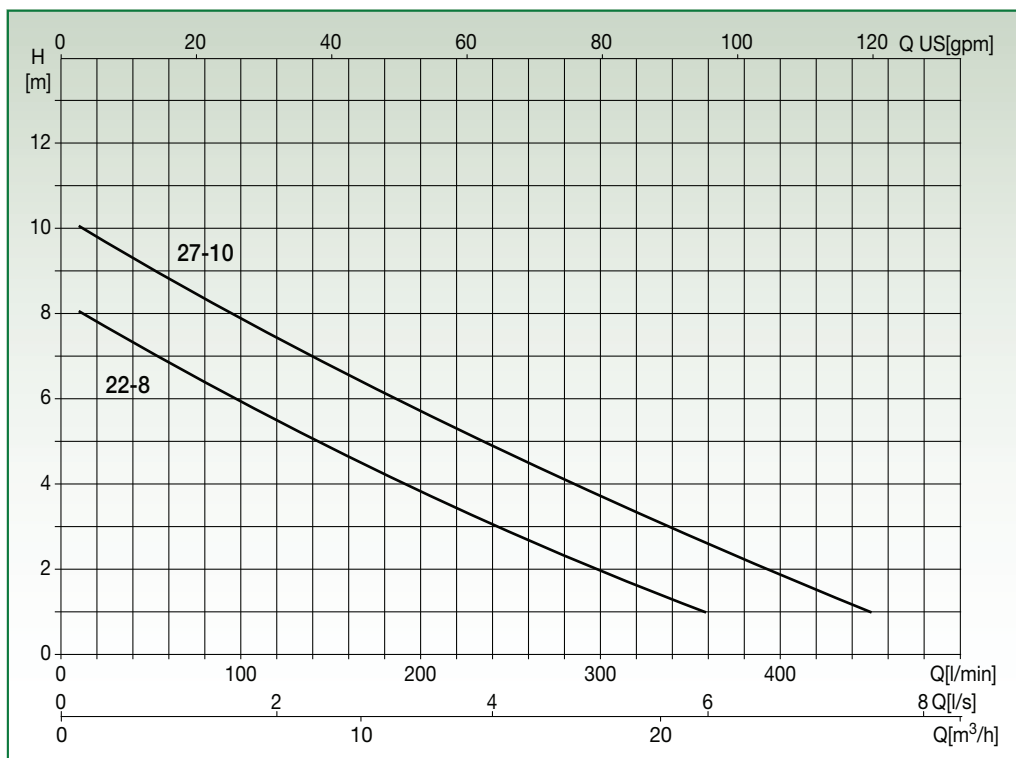

Collaudo a norma UNI EN ISO 9906 liv. 2 - Liquido di prova: acqua ($\rho = 1000 \text{ kg/m}^3$, visc. cinematica $\nu = 1 \text{ mm}^2/\text{s}$) - Tolleranze curve prestazione sec. norma UNI EN ISO 9906 All. A
Test to UNI EN ISO 9906 level 2 - Test liquid: water ($\rho = 1000 \text{ kg/m}^3$, kinematic viscosity $\nu = 1 \text{ mm}^2/\text{s}$) - Tolerance on performance curves to UNI EN ISO 9906 Annex A

DATI PRESTAZIONALI / PERFORMANCE DATA

Codice Code	Modello / Model	Motore / Motor				Portata / Capacity											
		P _{1n}	P _{2n}	V _n	I _n	[l/min]	10	50	100	150	200	250	300	360	450		
		[kW]	[kW]	[V]	[A]												
10042447	BLACK 2G1 22-8 M	1,1	0,6	1x230	4,3	H [m]	8	7	6	4,9	3,8	2,9	2	1			
10042448	BLACK 2G1 22-8 MA	1,1	0,6	1x230	4,3		8	7	6	4,9	3,8	2,9	2	1			
10042449	BLACK 2G1 22-8 T	0,9	0,6	3x400	1,5		8	7	6	4,9	3,8	2,9	2	1			
10042450	BLACK 2G1 27-10 M	1,5	0,75	1x230	4,8		10	9	8	6,8	5,7	4,7	3,7	2,6	1		
10042451	BLACK 2G1 27-10 MA	1,5	0,75	1x230	4,8		10	9	8	6,8	5,7	4,7	3,7	2,6	1		
10042452	BLACK 2G1 27-10 T	1,3	0,75	3x400	1,9		10	9	8	6,8	5,7	4,7	3,7	2,6	1		

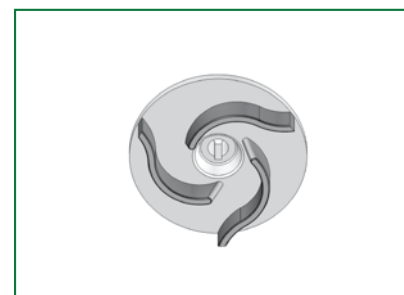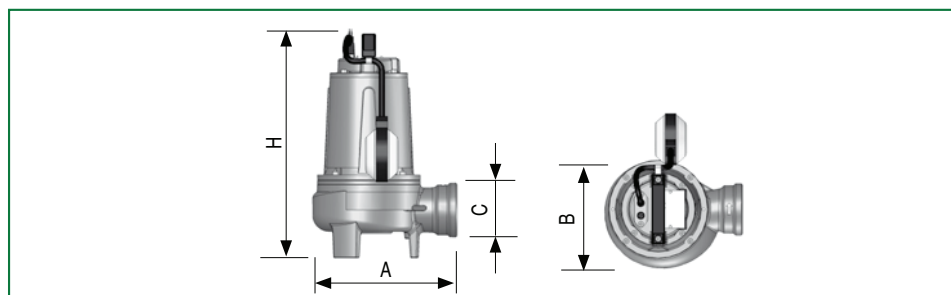

DATI DIMENSIONALI / DIMENSIONAL DATA

Modello / Model	Cavo / Cable	Dimensioni / Dimensions [mm]				Connessione / Connection		Passaggio solidi Solids handling [mm]	Peso Weight [kg]
	[n° x mm²]	H	A	B	C	[mm]	[in]		
BLACK 2G1 22-8 M	3 x 1	345	210	170	74	50	2"	17	15
BLACK 2G1 22-8 MA	3 x 1	345	210	170	74	50	2"	17	15
BLACK 2G1 22-8 T	4 x 1	345	210	170	74	50	2"	17	15
BLACK 2G1 27-10 M	3 x 1	345	210	170	74	50	2"	17	16
BLACK 2G1 27-10 MA	3 x 1	345	210	170	74	50	2"	17	16
BLACK 2G1 27-10 T	4 x 1	345	210	170	74	50	2"	17	16