


BLACK 2G

POMPA SOMMERSIBILE DA FOGNATURA / SUBMERSIBLE SEWAGE PUMP 1" 1/2 - DN 40 GHISA / CAST IRON - 2900 rpm



Girante vortex
Temp. liquido: 0°C +40°C
Temp. ambiente max: +40°C
Cavo elettrico: 10 m (H07RN-F)
Profondità max d'immersione: 20 m
Accessori vedi pag. 76


Vortex impeller
Liquid temperature: 0°C +40°C
Max. ambient temperature: +40°C
Power cable: 10 m (H07RN-F)
Maximum immersion depth: 20 m
Accessories see page 76

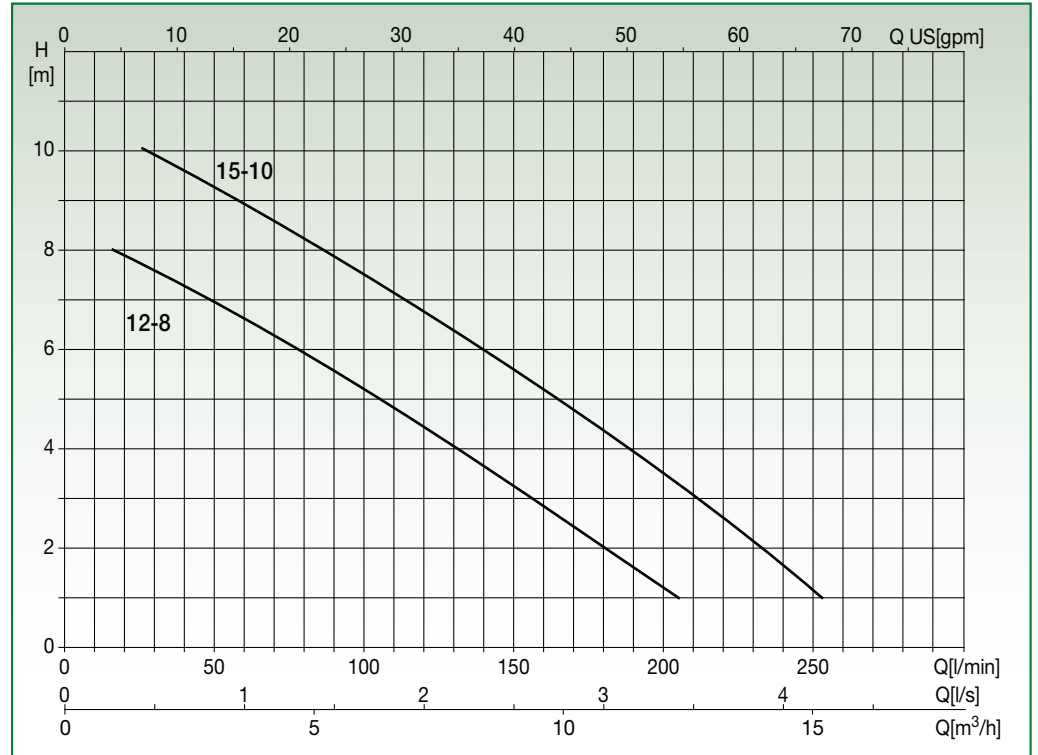

Collaudo a norma UNI EN ISO 9906 liv. 2 - Liquido di prova: acqua ($\rho = 1000 \text{ kg/m}^3$, visc. cinematica $\nu = 1 \text{ mm}^2/\text{s}$) - Tolleranze curve prestazione sec. norma UNI EN ISO 9906 All. A
Test to UNI EN ISO 9906 level 2 - Test liquid: water ($\rho = 1000 \text{ kg/m}^3$, kinematic viscosity $\nu = 1 \text{ mm}^2/\text{s}$) - Tolerance on performance curves to UNI EN ISO 9906 Annex A

DATI PRESTAZIONALI / PERFORMANCE DATA

Codice Code	Modello / Model	Motore / Motor				Portata / Capacity											
		P _{1n}	P _{2n}	V _n	I _n	[l/min]	15	25	50	75	100	125	150	175	205	255	
		[kW]	[kW]	[V]	[A]	[m³/h]	0,9	1,5	3	4,5	6	7,5	9	10,5	12,3	15,3	
10042465	BLACK 2G1 12-8 M	1,1	0,6	1x230	4,3	H [m]	8	7,7	7	6,2	5,2	4,3	3,3	2,2	1		
10042466	BLACK 2G1 12-8 MA	1,1	0,6	1x230	4,3		8	7,7	7	6,2	5,2	4,3	3,3	2,2	1		
10042467	BLACK 2G1 12-8 T	0,9	0,6	3x400	1,5		8	7,7	7	6,2	5,2	4,3	3,3	2,2	1		
10042468	BLACK 2G1 15-10 M	1,5	0,75	1x230	4,8			10	9,6	8,4	7,6	6,6	5,7	4,6	3,3	1	
10042469	BLACK 2G1 15-10 MA	1,5	0,75	1x230	4,8			10	9,6	8,4	7,6	6,6	5,7	4,6	3,3	1	
10042470	BLACK 2G1 15-10 T	1,3	0,75	3x400	1,9			10	9,6	8,4	7,6	6,6	5,7	4,6	3,3	1	

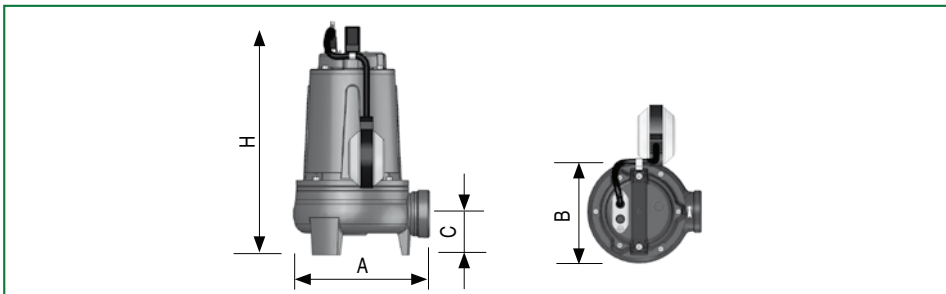

DATI DIMENSIONALI / DIMENSIONAL DATA

Modello / Model	Cavo / Cable [n° x mm²]	Dimensioni / Dimensions [mm]				Connessione / Connection		Passaggio solidi Solids handling [mm]	Peso Weight [kg]
		H	A	B	C	[mm]	[in]		
BLACK 2G1 12-8 M	3 x 1	317	188	164	57	40	1" 1/2	30	13
BLACK 2G1 12-8 MA	3 x 1	317	188	164	57	40	1" 1/2	30	13
BLACK 2G1 12-8 T	4 x 1	317	188	164	57	40	1" 1/2	30	13
BLACK 2G1 15-10 M	3 x 1	317	188	164	57	40	1" 1/2	30	14
BLACK 2G1 15-10 MA	3 x 1	317	188	164	57	40	1" 1/2	30	14
BLACK 2G1 15-10 T	4 x 1	317	188	164	57	40	1" 1/2	30	14