




- | | | | |
|--|---------------------------|--|--------------------------|
| | Ghisa EN-GJL-250 | | Cast Iron EN-GJL-250 |
| | Fonte EN-GJL-250 | | Grauguss EN-GJL-250 |
| | Hierro fundido EN-GJL-250 | | Ferro fundido EN-GJL-250 |

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

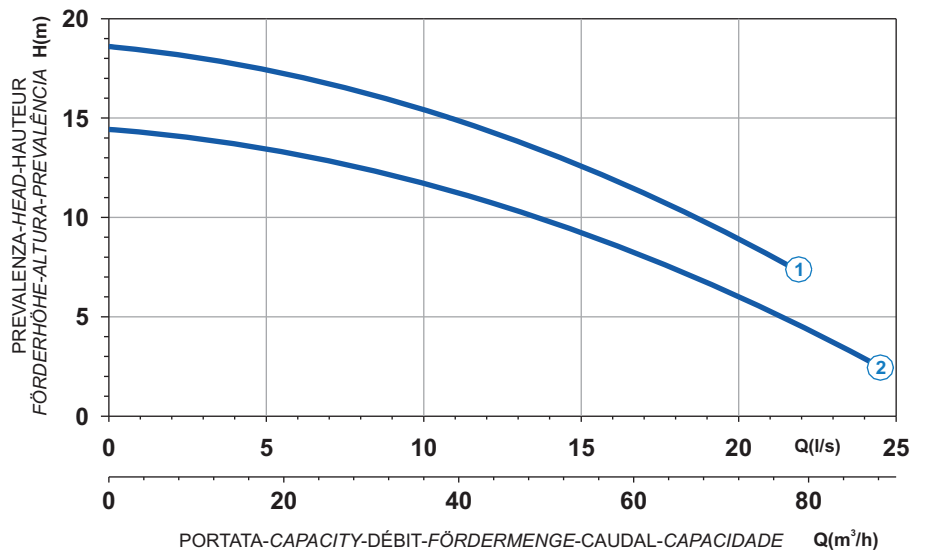

Power supply	3ph 400V 50Hz
R.P.M.	2850
Free passage (mm)	30
Discharge (mm)	DN 65
Weight (Kg)	61

Curve N°	Code	Type	MOTOR			ATEX code
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7003208	G209T3C2-L30AA0	3,2	6,5	31,8	7008558
2	7005459	G209T3C3-L30AA0	3,2	6,5	31,8	7005911

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Dimensões (mm)

