


 Ghisa EN-GJL-250	 Cast Iron EN-GJL-250
 Fonte EN-GJL-250	 Grauguss EN-GJL-250
 Hierro fundido EN-GJL-250	 Ferro fundido EN-GJL-250



Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

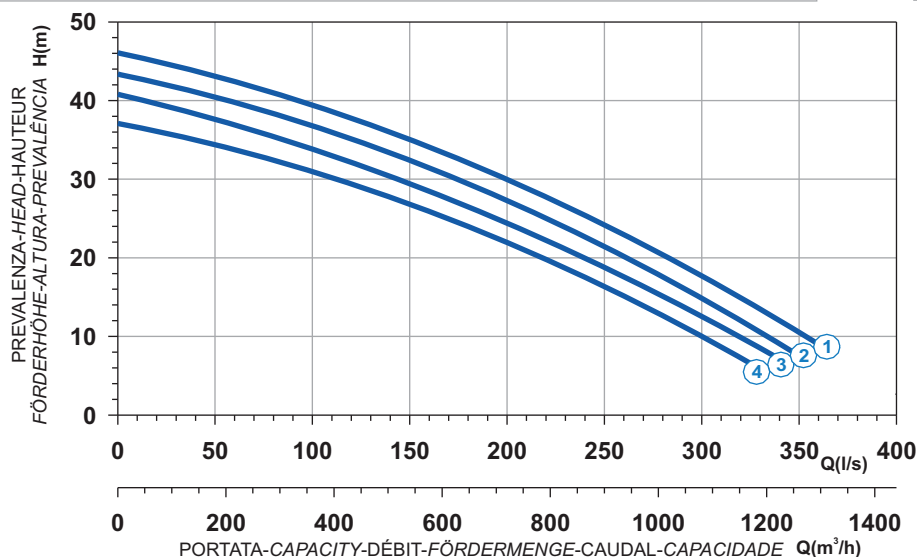


Curve N°	Code	Type	MOTOR			ATEX code	
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)		
1	7000228	G425R2C1-V105AA2	79,5	135	796,5	-	
2	7000230	G425R2C2-V105AA2	79,5	135	796,5	-	
3	7000323	G425R2C3-V105AA2	77,2	135	796,5	-	
4	7000325	G425R2C4-V105AA2	77,2	135	796,5	-	

Power supply	3ph 400/690V 50Hz
R.P.M.	1450
Free passage (mm)	105
Discharge (mm)	DN 250
Weight (Kg)	914

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Dimensões (mm)

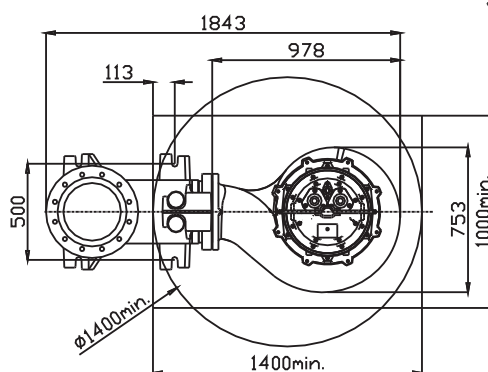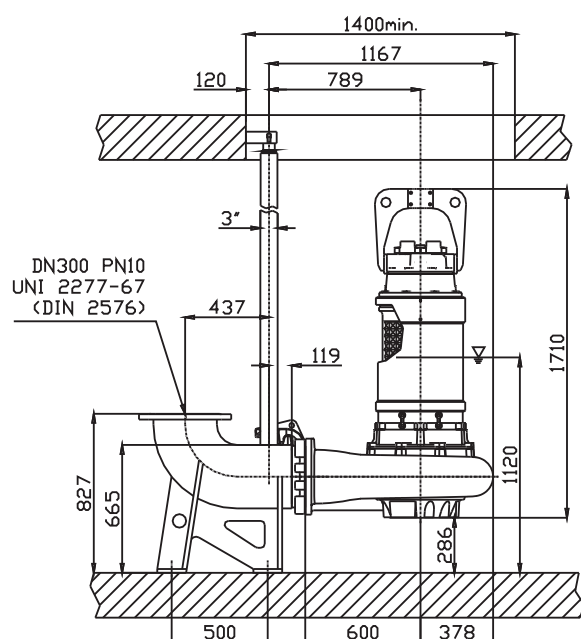

▽ LIVELLO MINIMO SOMMERGIBILITÀ
MINIMUM SUBMERSIBLE LEVEL
NIVEAU MINIMUM D'IMMERSION
MINDESTWASSERSTAND
MINIMO NIVEL
NÍVEL MÍNIMO DE SUBMERGIBILIDADE

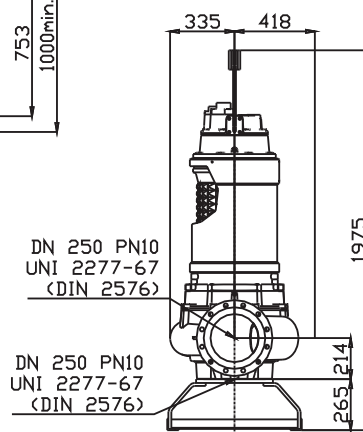

Versione disponibile con mantello di raffreddamento - Type available also with cooling jacket
Version disponible avec chemise de refroidissement - Ausführung auch mit Kühlmantel lieferbar
Disponible también con camisa de refrigeración - Versão disponível com cobertura de arrefecimento