

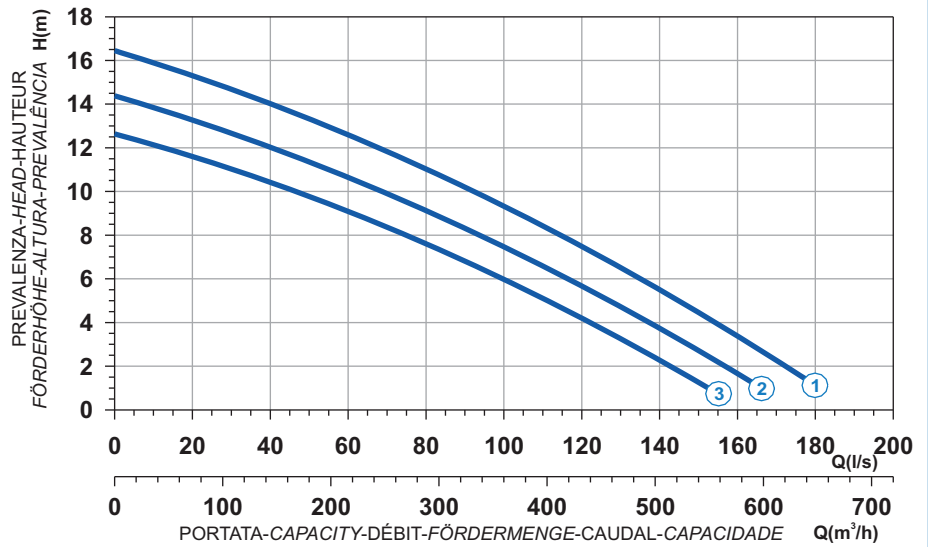

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica



Power supply	3ph 400/690V 50Hz
R.P.M.	950
Free passage (mm)	102
Discharge (mm)	DN 200
Weight (Kg)	471

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7009950	G616R2C1-T102AA2	19,8	39	230	-
2	7009945	G616R2C2-T102AA2	15,9	31,5	186	-
3	7009941	G616R2C3-T102AA2	15,9	31,5	186	-

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Dimensões (mm)

