

12"D


VACUUM-PRIME UNIT S 12"D/ J300 TWGR/ZD/N75



Features

- Automatic dry priming with vacuum pump
- Robust construction with cast iron separator
- Oil-lubricated vacuum pump with oil recovery system
- Self-priming water pump
- Fuel tank for over 24 hours operation
- Heavy duty two-wheeled site trailer with lifting hook and articulated tow bar


Performance

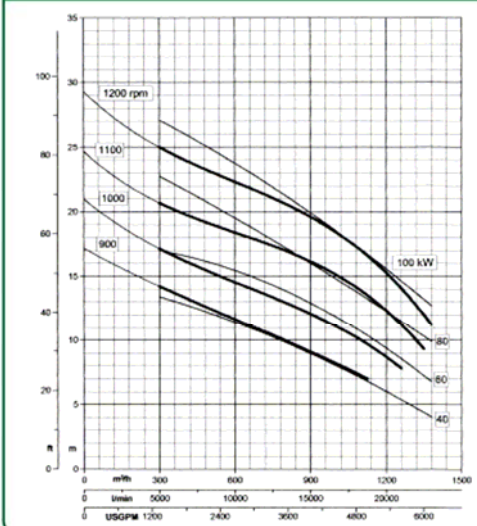

Specifications

- Max. water capacity: 1380 m³/h
- Max. head.: 27 m
- Speed: 1150 RPM
- Size of solids handled: 70 mm (4 blade impeller)
- Cast iron construction
- Replaceable wear plates
- Silicon carbide mechanical seal with automatic lubricator
- Rated vacuum pump capacity: 75 m³/h
- DEUTZ BF6L 914 diesel engine, continuous power output: 110 kW at 2300 RPM
- Electric start

Overall dimensions - Weight

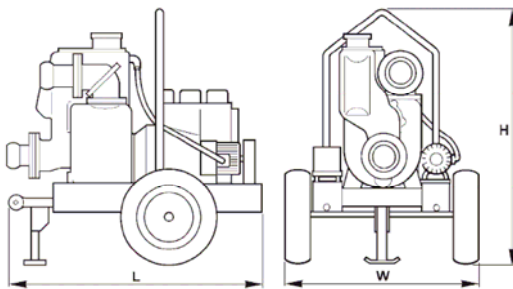

L	W	H	Weight
4000mm	1500mm	2500mm	2600kg

Applications

- Wellpoint dewatering systems
- Horizontal drainage with drainage hoses
- Construction site dewatering
- Sewage by-pass
- Quarries
- Sludge and slurry

Code:

List price:



VARISCO S.p.A.
 Zona Industriale Nord - 35129 PADOVA - ITALIA
 Direzione e Uffici: Terza Strada, 9 / Produzione e magazzini: Prima Strada, 37
 Tel. +39 049 8294111 - international +39 049 8294111
 Fax +39 049 8294373 +39 049 8076762
 italia@variscospa.com export@variscospa.com
 www.variscospa.com

AZIENDA CON SISTEMA
 GESTIONE QUALITA'
 CERTIFICATO
 UNI EN ISO 9001-2000