

# 4" D


## VACUUM-PRIME UNIT S 4" D/ J4-250TWGMVM/N45



### Features

- Automatic dry priming with vacuum pump
- Robust construction with cast iron separator
- Oil-lubricated vacuum pump with oil recovery system
- Self-priming water pump
- Fuel tank for over 24 hours operation
- Heavy duty two-wheeled site trailer with lifting hook and articulated tow bar


### Performance

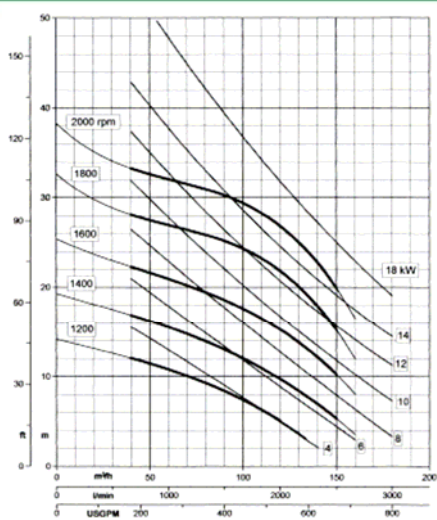

### Specifications

- Max. water capacity: 150 m<sup>3</sup>/h
- Max. head.: 32 m
- Speed: 1800 RPM
- Size of solids handled: 50 mm (2 blade impeller)
- Cast iron construction
- Rubber faced wear plates
- Silicon carbide mechanical seal with automatic lubricator
- Rated vacuum pump capacity: 45 m<sup>3</sup>/h
- VM SUN 2105E2 diesel engine, continuous power output: 22 kW at 1800 RPM
- Electric start

### Overall dimensions - Weight

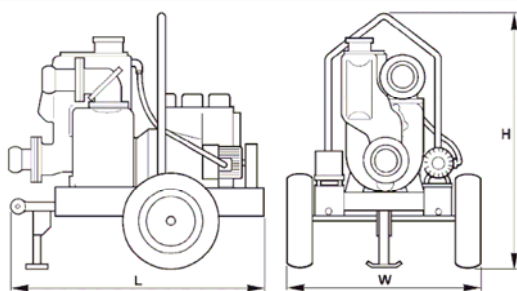

L	W	H	Weight
1450mm	1130mm	1470mm	560kg

### Applications

- Wellpoint dewatering systems
- Horizontal drainage with drainage hoses
- Construction site dewatering
- Sewage by-pass
- Quarries
- Sludge and slurry

Code:

List price:

**varisco**  
a solid name in fluids

**VARISCO S.p.A.**  
Zona Industriale Nord - 35129 PADOVA - ITALIA  
Direzione e Uffici: Terza Strada, 9 / Produzione e magazzini: Prima Strada, 37  
Tel. +39 049 8294111 - international +39 049 8294111  
Fax +39 049 8294373 +39 049 8076762  
italia@variscospa.com export@variscospa.com  
www.variscospa.com

AZIENDA CON SISTEMA  
GESTIONE QUALITA'  
CERTIFICATO  
UNI EN ISO 9001-2000