

# 6" E


VACUUM-PRIME UNIT  
S 6" E/  
J6-250W TWGMC/N75



### Features

- Automatic dry priming with vacuum pump
- Robust construction with cast iron separator
- Oil-lubricated vacuum pump with oil recovery system
- Self-priming water pump
- Heavy duty two-wheeled site trailer with lifting hook and articulated tow bar


### Performance

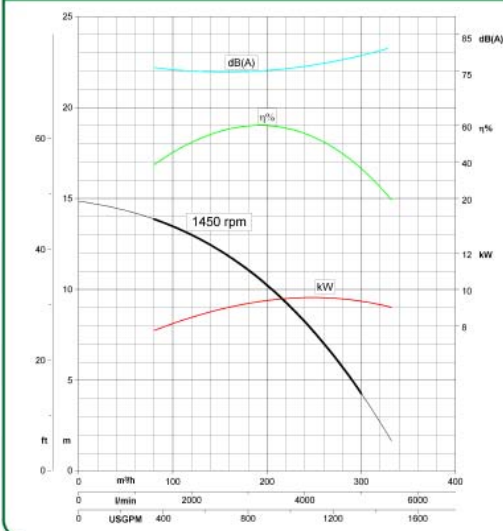

### Specifications

- Max. water capacity: 300 m<sup>3</sup>/h
- Max. head.: 15 m
- Speed: 1450 RPM
- Size of solids handled: 45 mm (3 blade impeller)
- Cast iron construction
- Rubber faced wear plates
- Silicon carbide mechanical seal with automatic lubricator
- Rated vacuum pump capacity: 75 m<sup>3</sup>/h
- Pump electric motor: 11 kW
- Control panel to CE standards

### Overall dimensions - Weight

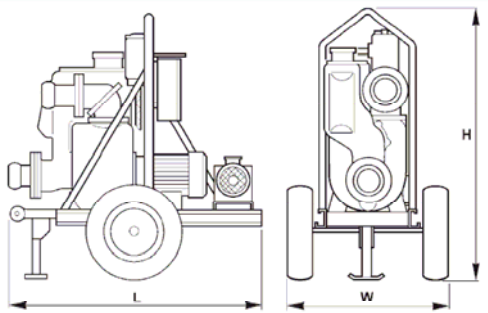

L	W	H	Weight
1730mm	990mm	1600mm	570kg

### Applications

- Wellpoint dewatering systems
- Horizontal drainage with drainage hoses
- Construction site dewatering
- Sewage by-pass
- Quarries
- Sludge and slurry

Code: 10024223

List price:

**varisco**  
a solid name in fluids

**VARISCO S.p.A.**  
Zona Industriale Nord - 35129 PADOVA - ITALIA  
Direzione e Uffici: Terza Strada, 9 / Produzione e magazzini: Prima Strada, 37  
Tel. +39 049 8294111 - international +39 049 8294111  
Fax +39 049 8294373 +39 049 8076762  
italia@variscospa.com export@variscospa.com  
www.variscospa.com

AZIENDA CON SISTEMA  
GESTIONE QUALITA'  
CERTIFICATO  
UNI EN ISO 9001-2000