

## ELETTROPOMPE SOMMERSE MULTISTADIO PER POZZI 6" MULTISTAGE SUBMERSIBLE PUMPS FOR 6" WELLS

### LIMITI D'IMPIEGO

- Temperatura liquido fino a 35° C
- Profondità immersione 20 mt.
- Contenuto di sabbia 40 g/m<sup>3</sup>
- Partenza/ora 45 max.

### MOTORE

- Motore elettrico ad induzione a 2 poli (n = 2850 min-1)
- Protezione amperometrica a riarmo automatico incorporata
- Isolamento Classe F
- Protezione IP 68

### MATERIALI

- Corpo pompa Acciaio Inox
- Griglia Acciaio Inox
- Girante e diffusori Acciaio Inox
- Supporti Bronzo
- Albero Acciaio Inox
- Corpo motore Acciaio Inox
- Tenuta meccanica Silicio/Silicio

### OPERATING CONDITIONS

- Liquid temperature up to 35°C
- Submersion depth 20m
- Sand content 40 g/m<sup>3</sup>
- Start/hour 45 max

### MOTOR




- Two-Pole induction motor (n = 2850 min-1)
- Built-in over load motor protector with automatic reset
- Insulation Class F
- Protection IP 68

### MATERIALS

- External pump body Stainless Steel
- Suction strainer Stainless Steel
- Impeller and diffusers Stainless Steel
- Bearing brackets Bronze
- Shaft Stainless Steel
- Motor housing Stainless Steel
- Mechanical seal Silicon/Silicon



TIPO - TYPE	SCX 304/S	SCX 305/S	SCX 307/S	SCX 604/S
P1	850 W	1100 W	1400 W	1100 W
Voltage	230 V	230 V	230 V	230 V
Frequency	50 Hz	50 Hz	50 Hz	50 Hz
Ampere	3,8 A	4,5 A	6,2 A	5,3 A
Q max.	90 l/1'	90 l/1'	90 l/1'	140 l/1'
H max.	44 m	55 m	77 m	45 m
Dnm	1"1/4	1"1/4	1"1/4	1"1/4

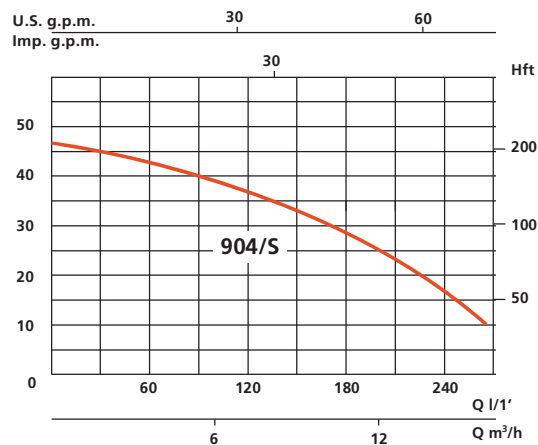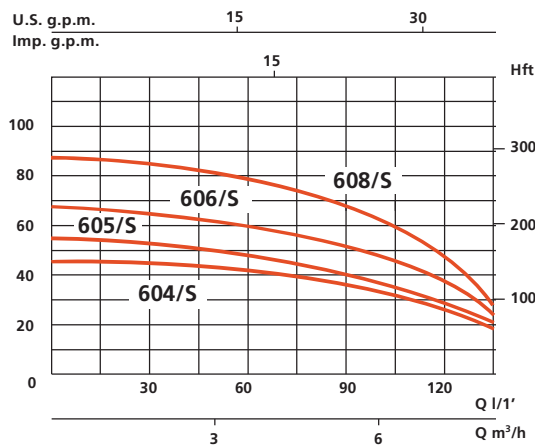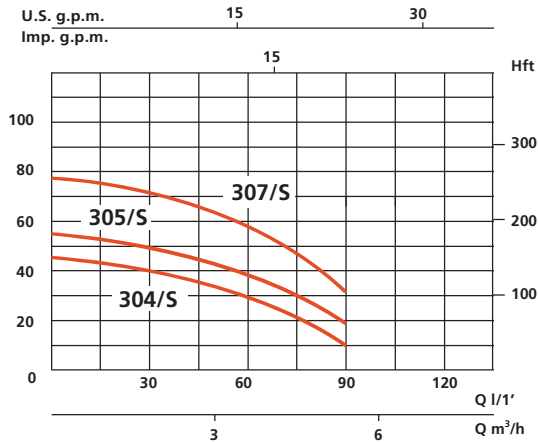

TIPO - TYPE	SCX 605/S	SCX 606/S	SCX 608/S	SCX 904/S
P1	1400 W	1500 W	2000 W	2000 W
Voltage	230 V	230 V	230 V	230 V
Frequency	50 Hz	50 Hz	50 Hz	50 Hz
Ampere	6,2 A	6,8 A	8,5 A	8,5 A
Q max.	140 l/1'	140 l/1'	140 l/1'	250 l/1'
H max.	58 m	67 m	89 m	47 m
Dnm	1"1/4	1"1/4	1"1/4	1"1/4