


 Ghisa EN-GJL-250	 Cast Iron EN-GJL-250
 Fonte EN-GJL-250	 Grauguss EN-GJL-250
 Hierro fundido EN-GJL-250	 Ferro fundido EN-GJL-250



Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

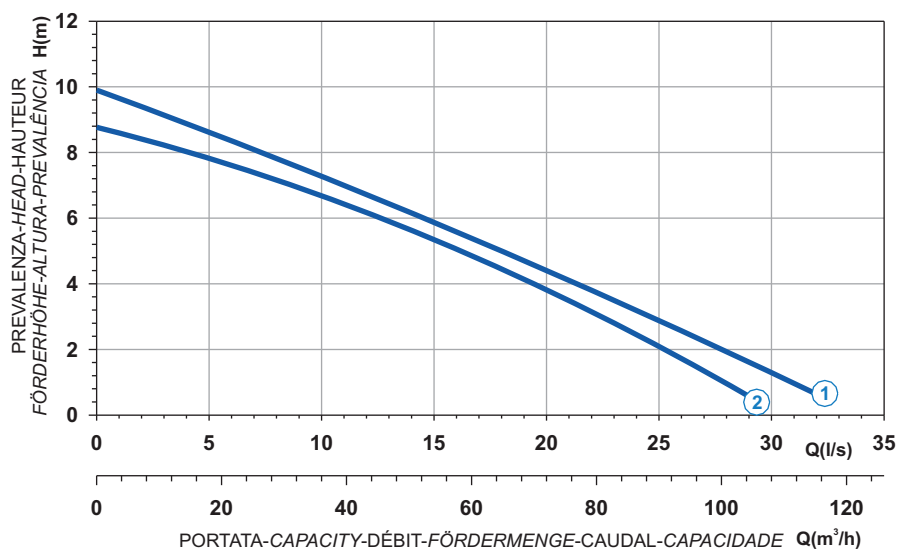

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7002013	G409T6V1-M64AA0	2,8	6,5	29,2	7002794
2	7002018	G409T6V2-M64AA0	2,8	6,5	29,2	7002796

Power supply	3ph 400V 50Hz
R.P.M.	1450
Free passage (mm)	64
Discharge (mm)	DN 80
Weight (Kg)	64

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Dimensões (mm)

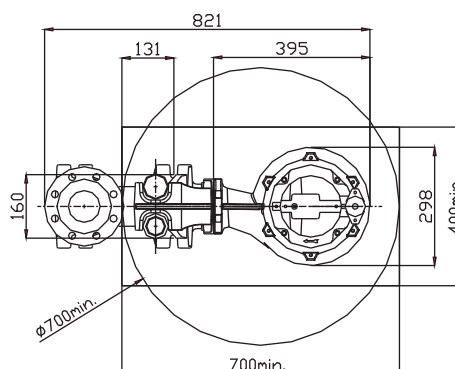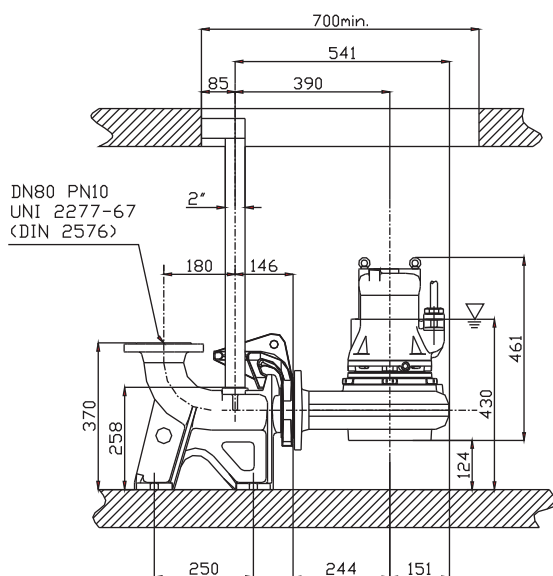

▽ LIVELLO MINIMO SOMMERGIBILTÀ
MINIMUM SUBMERSIBLE LEVEL
NIVEAU MINIMUM D'IMMERSION
MINDESTWASSERSTAND
MINIMO NÍVEL
NÍVEL MÍNIMO DE SUBMERGIBILIDADE

