




- Ghisa EN-GJL-250
- Cast Iron EN-GJL-250
- Fonte EN-GJL-250
- Grauguss EN-GJL-250
- Hierro fundido EN-GJL-250
- Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

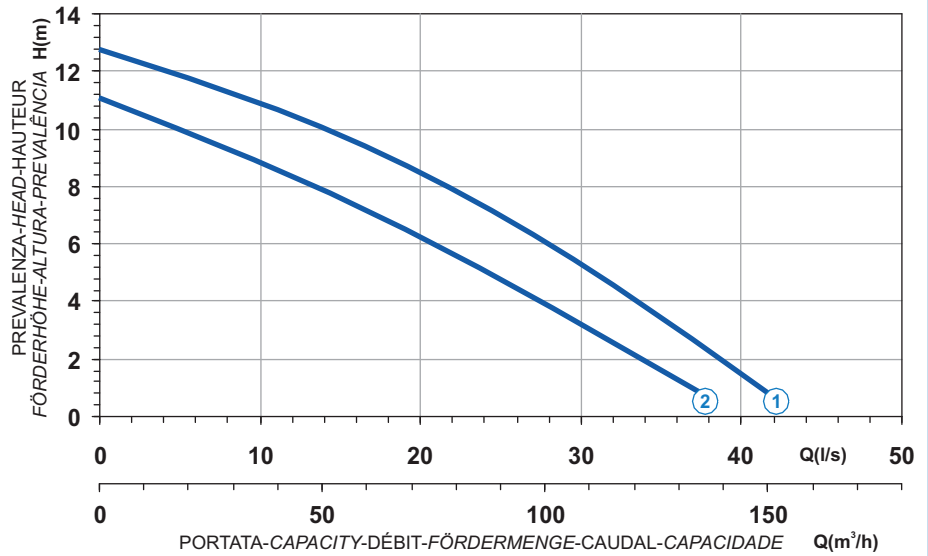

Power supply	3ph 400/690V 50Hz
R.P.M.	1450
Free passage (mm)	64
Discharge (mm)	DN 80
Weight (Kg)	79

Curve N°	Code	Type	MOTOR			ATEX code
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7002016	G410R6V1-M64AA2	4,6	9,5	42,7	7008203
2	7007908	G410R6V2-M64AA2	3,8	8	36	7002765

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Dimensões (mm)

