


95 PR2 N (4")

CE Tolleranze secondo - Tolerance according to - Tolérances selon
Tolerancias según norma EN UNI-ISO 9906 - 4" (100 mm)



H = Prevalenza totale. **Da 17 a 413 m**
Q = Portata. **Da 20 a 60 l/min**
 $\eta\%$ = Rendimento della pompa. **Max 55,0 %**
W/st = Assorbim. per stadio. **Max 52,00**
Massimo contenuto di sabbia. **300 g/m³**
S = Battente minimo (m) **Max 1**

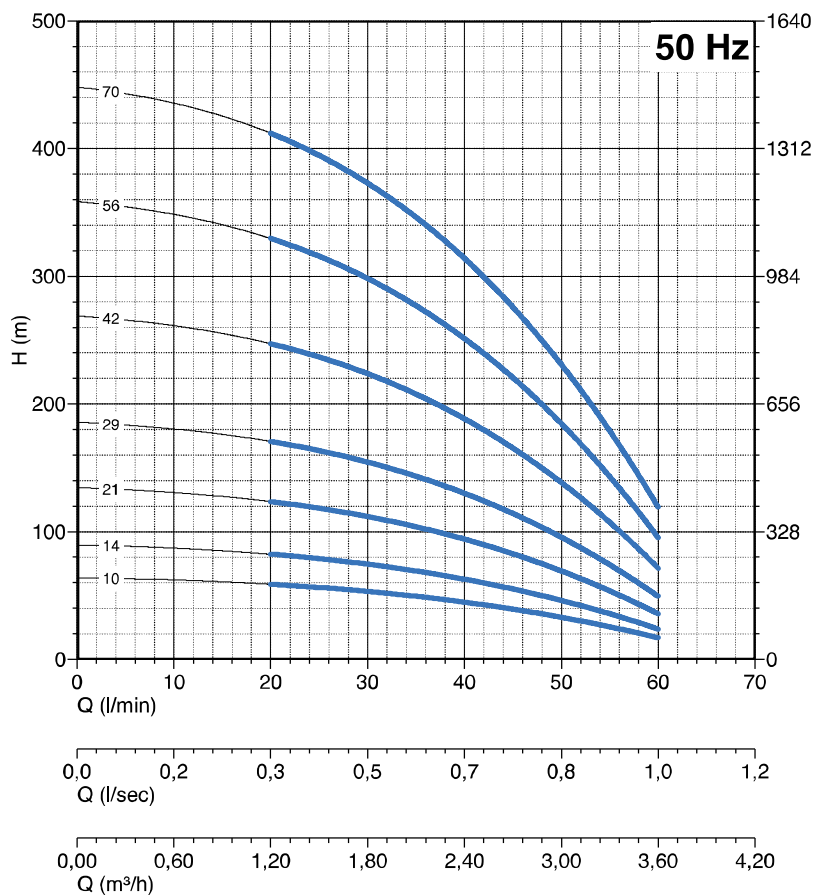


H = Total head. **From 17 to 413 m**
Q = Capacity. **From 20 to 60 l/min**
 $\eta\%$ = Pump efficiency. **Max 55,0 %**
W/st = Stage absorption. **Max 52,00**
Maximum sand content **300 g/m³**
S = Minimum head (m) **Max 1**




H = hauteur manométrique. **From 17 to 413 m**
Q = Débit. **From 20 to 60 l/min**
 $\eta\%$ = Rendement de la pompe. **Max 55,0 %**
W/st = Absorption par étage. **Max 52,00**
Contenu maximal de sable. **300 g/m³**
S = Niveau minimal (m). **Max 1**



H = Altura manométrica. **Da 17 a 413 m**
Q = Caudal. **De 20 a 60 l/min**
 $\eta\%$ = Rendimiento de la bomba. **Max 55,0 %**
W/st = Potencia absorbida por etapa. **Max 52,00**
Contenido máximo de arena. **300 g/m³**
S = Nivel mínimo (m) **Max 1**

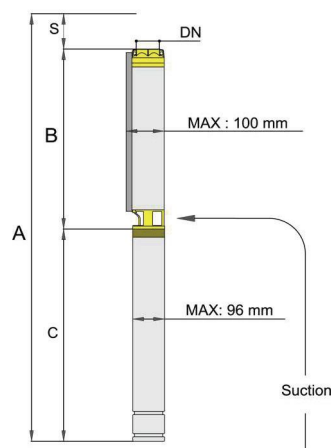

DN : TYPE 95 PR 1
TYPE 95 PR 2 = 1" 1/4 GAS
TYPE 95 PR 3
TYPE 95 PR 4
DN : TYPE 95 PR 6
TYPE 95 PR 8
TYPE 95 PR 10 = 2" GAS
TYPE 95 PR 12
TYPE 95 PR 15

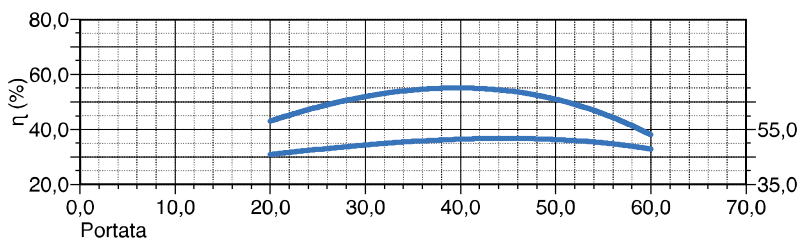

Motore - Motor - Moteur Caratteristiche a 2900 rpm					Q=Portata - Capacity - Debit							
Tipo - Type	Power		Mono Fase Single phase V230		V 400	I/min	0	20	30	40	50	60
	kW	HP	A	μ F		I/sec	0,00	0,33	0,50	0,67	0,83	1,00
95 PR2 N/10	0,55	0,75	5	20	1,7	m³/h	0,0	1,2	1,8	2,4	3,0	3,6
95 PR2 N/14	0,75	1	6,5	30	2,2	H[m]	64	59	53	45	33	17
95 PR2 N/21	1,10	1,5	9,6	40	3,1	90	83	74	63	46	24	
95 PR2 N/29	1,50	2	11,8	50	4,0	134	124	111	95	69	36	
95 PR2 N/42	2,20	3	15,2	76	5,8	186	171	154	131	96	49	
95 PR2 N/56	3,00	4	-	-	7,5	269	248	223	189	139	71	
95 PR2 N/70	4,00	5,5	-	-	9,8	358	330	297	252	185	95	
						448	413	371	315	231	119	

Dimensioni di ingombro e pesi Overall dimensions and weights								
Tipo - Type	A	A	B	C	C	M	M	P
	mm Mono	mm Tri	mm	mm Mono	mm Tri	kg Mono	kg Tri	kg
95 PR2 N/10	718	698	381	337	317	8	8	4
95 PR2 N/14	831	806	469	362	337	10	10	4,3
95 PR2 N/21	1037	1007	645	392	362	12	12	5,3
95 PR2 N/29	1243	1213	821	422	392	13	13	6,5
95 PR2 N/42	1596	1581	1129	467	452	15	15	8,3
95 PR2 N/56	0	1994	1437	0	557	0	19	10,8
95 PR2 N/70	0	2364	1767	0	597	0	22	13,4