



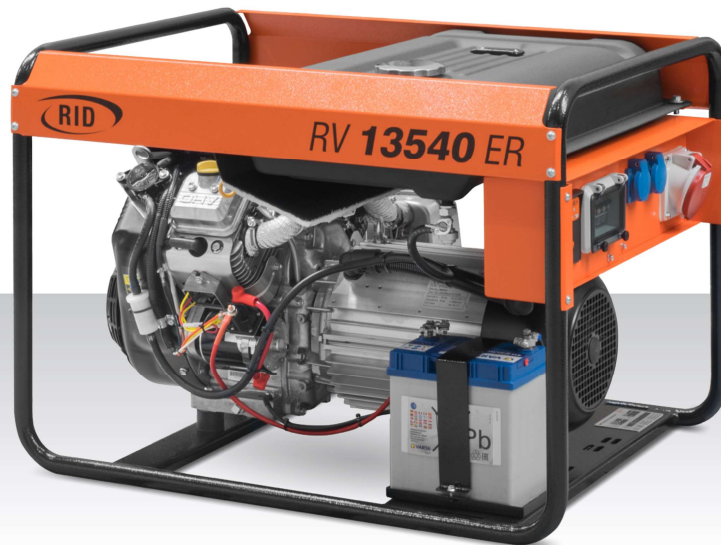

MADE IN GERMANY

## PORTABLE GENSETS WITH PROTECTION CLASS IP 54



### TECHNICAL DATA:

TYPE		RV 9540 ER	RV 10540 ER	RV 13540 ER	RV 15540 ER
Order number		717029	717024	717030	717032
Generator type		synchronous	synchronous	synchronous	synchronous
Nom. output 3~ (cos $\Phi=0,8$ )	kVA	9,0	10,0	13,0	15,0
Nom. output 1~	kVA	6,0	5,7	7,0	8,0
Voltage (1~) / (3~)	V	230 / 400	230 / 400	230 / 400	230 / 400
Nom. current (1~) / (3~)	A	26,0 / 13,0	25 / 14,5	30,4 / 18,8	34,8 / 21,7
Frequency	Hz	50	50	50	50
Protection Class		IP54	IP54	IP54	IP54
Engine type		B & S Vanguard 385447	B & S Vanguard 385447	B & S Vanguard 385447	B & S Vanguard 386447
Cylinder		2	2	2	2
Rotational-speed range	rpm	3000	3000	3000	3000
Type of fuel		gasoline 92 / 95	gasoline 92 / 95	gasoline 92 / 95	gasoline 92 / 95
Oil		SAE 15W-40	SAE 15W-40	SAE 15W-40	SAE 15W-40
Oil volume in engine	l	1,7	1,7	1,7	1,7
Engine output	kW	13,0	13,0	13,0	13,5
Cooling		air	air	air	air
Tank capacity	l	25	25	25	25
Hand starter (H) / electr. starter (E)		H / E	H / E	H / E	H / E
Fuel consumption load 100%	l/h	5,0	5,0	5,0	5,2
Weight	kg	135	137	140	148
Dimensions (L x W x H)	mm	853 x 649 x 620	853 x 649 x 620	853 x 649 x 620	853 x 649 x 620
Noise level	dB(A)	72	72	72	72

OPTIONS	DESCRIPTION	ORDER NUMBER
Exhaust hose	Ø 50 mm, length 1,5 m	715052
Exhaust hose	Ø 50 mm, length 2,5 m	715051
Engine adapter for exhaust hose	for engines Briggs & Stratton VANGUARD	716010
Chassis with wheels and handles	for all types on tubular frames	713203
Earthing set	earthing pike (0,45 m length), earthing cable 10 mm <sup>2</sup>	736110
Spare parts	for all products of equipment	on request